

Requested Patent: EP1185877A1

Title: RADIO POSITIONING SYSTEMS ;

Abstracted Patent: US6529165 ;

Publication Date: 2003-03-04 ;

Inventor(s):

DUFFETT-SMITH PETER JAMES (GB); HANSEN PAUL (GB); BRICE JAMES PAUL (GB) ;

Applicant(s): CAMBRIDGE POSITIONING SYS LTD (GB) ;

Application Number: US20010830452 20010427 ;

Priority Number(s): GB19990012724 19990601; WO2000GB02105 20000601 ;

IPC Classification: G01S3/02; H04Q7/20 ;

Equivalents:

AU5231700, AU5231800, BR0011067, BR0011068, CA2368125, CA2368126, CZ20014255, CZ20014298, EA3115, EA3597, EP1185878 (WO0073814), HR20010882, HR20010883, HU0202629, HU0202981, JP2003501632T, JP2003501633T, NO20015846, NO20015847, PL351871, PL352012, SK15352001, SK15362001, TR200103429T, TR200103434T, TW487808, TW494248, WO0073813, WO0073814, ZA200108671, ZA200108672 ;

#### ABSTRACT:

The invention concerns a method of determining the position or change in position or state of motion of a receiver or receivers, the position or change in position or state of motion of which is or are not already known, in a network of transmission sources some or all of whose positions are known. At a first time, the relative offsets in time, phase, frequency, or derivatives thereof with respect to each other, or with respect to a reference source, of the signals received by a first receiver from a plurality of the transmission sources are measured. At a selected second time, the respective offsets of the signals received by the same or a second receiver, whose position or state of motion is not already known, from the plurality of the transmission sources are measured. Then the position of the receiver or receivers at the first or second times or the change in position of the first receiver between the first and second times or the state of motion of either receiver is calculated from the relationship between the first and second sets of relative offsets

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 December 2000 (07.12.2000)


PCT

(10) International Publication Number  
**WO 00/73813 A1**

- (51) International Patent Classification<sup>7</sup>: **G01S 5/10**,  
5/00, 1/02, H04Q 7/38
- (21) International Application Number: **PCT/GB00/02104**
- (22) International Filing Date: **1 June 2000 (01.06.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
9912724.3 **1 June 1999 (01.06.1999)** **GB**
- (71) Applicant (for all designated States except US): **CAMBRIDGE POSITIONING SYSTEMS LTD.** [GB/GB];  
62-64 Hills Road, Cambridge CB2 1LA (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BRICE, James**,  
Paul [GB/GB]; 4 Brampton Road, Cambridge CB1 3HL  
(GB). **DUFFETT-SMITH, Peter, James** [GB/GB]; 41  
Denmark Road, Cottenham, Cambridge CB4 8QS (GB).
- HANSEN, Paul [GB/GB]; 2 Providence Close, Somersham, Cambridge PE17 3YR (GB).
- (74) Agent: **GILL JENNINGS & EVERY**; Broadgate House,  
7 Eldon Street, London EC2M 7LH (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE,  
DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,  
ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR,  
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.

[Continued on next page]

(54) Title: **IMPROVEMENTS IN RADIO POSITIONING SYSTEMS**

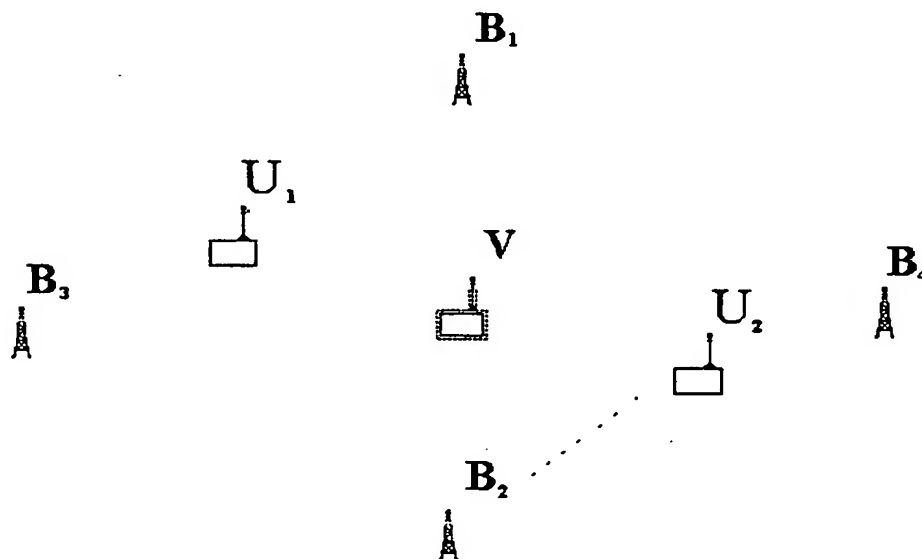

(57) Abstract: The invention described relates to a radio positioning system primarily for a mobile telephone network, in which a list of offsets in time, phase, frequency, or derivatives thereof, or their equivalents expressed as offsets in distance or derivatives thereof, of a plurality of transmission source signals, received at a given location, relative to a common reference are generated. Data is acquired from one or more receivers, the positions of which may be known or determined. Such data are offsets in time, phase, frequency, or derivatives thereof, respectively of signals received from the transmission sources relative to a reference source in each receiver or to each other. The acquired data is combined for calculating the list of offsets relative to the common reference.

WO 00/73813 A1

WO 00/73813 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## IMPROVEMENTS IN RADIO POSITIONING SYSTEMS

The present invention relates generally to improvements in radio positioning systems and their methods of operation and, more particularly, to methods and apparatus for  
5 simplifying the acquisition of data required in such systems.

EP-A-0 303 371, the contents of which are hereby incorporated by reference, describes a radio navigation and tracking system which makes use of independent radio transmitters set up for other purposes. The signals from each transmitter, taken  
10 individually, are received by two receiving stations, one at a fixed and known location, and the other mounted on the mobile object whose position is to be determined. A representation of the signals received at one receiving station is sent via a link to a processor at the other receiving station, where the received signals are compared to find their phase differences or time delays. Three such measurements, made on three  
15 widely spaced independent transmitters, are sufficient to determine the position of the mobile receiver in two dimensions, i.e. its position on the ground. The phase or time offset between the master oscillators in the two receivers is also determined.

"CURSOR", as the system described in EP-A-0 303 371 is known, is a radio  
20 positioning system which can use the signals radiated by existing non-synchronised radio transmitters to locate the position of a portable receiver. Unlike some other systems which use the temporal coherence properties of networks of purpose-built synchronised transmitters, CURSOR makes use of the spatial coherence of the signals transmitted by single transmitters. In a further development (see EP-A-0 880 712 &  
25 WO-A-99/21028), the technology has been applied to find the position of a mobile phone handset in a GSM or other digital telephone system, and these are examples of an 'Enhanced Observed Time Difference' (E-OTD) method using the down-link signals radiated by the network of Base Transceiver Stations (BTS) of the telephone system.

30

In the digital mobile telephone application described in EP-A-0 880 712, the contents of which are hereby incorporated by reference, the signals from each BTS within range of the handset are received both by the handset itself and by a fixed nearby receiver, the Location Measurement Unit (LMU), whose position is accurately known.

Representations of the received signals are passed to a Mobile Location Centre (MLC) where they are compared in order to find the time difference between them. Figure 1 shows the geometry of a standard two-dimensional system. The origin of Cartesian co-ordinates  $x$  and  $y$  is centred on the LMU positioned at  $O$ . The orientation of the axes is immaterial, but may conveniently be set so that the  $y$  axis lies along the north-south local map grid. The handset,  $R$ , is at vector position  $r$  with respect to the LMU position  $O$ . A BTS,  $A$ , is shown at vector position  $a$ .

Consider first the signals from BTS  $A$ . The time difference,  $\Delta t_a$ , measured between the signals received at  $R$  and  $O$  is given by

$$\Delta t_a = (|r - a| - |a|)/v + \varepsilon,$$

where  $v$  is the speed of the radio waves,  $\varepsilon$  is the clock time offset between the clocks in the receivers at  $R$  and  $O$ , and the vertical bars each side of vector quantities denote that it is the magnitude of the vectors which are used in the equation. The value of  $\varepsilon$  represents the synchronisation error between the measurements made by the two receivers. Similarly, may be written for two other BTSs ( $B$  and  $C$ ) at vector positions  $b$  and  $c$  (not shown):

$$\Delta t_b = (|r - b| - |b|)/v + \varepsilon,$$

$$\Delta t_c = (|r - c| - |c|)/v + \varepsilon. \quad (1)$$

The values of  $\Delta t_a$ ,  $\Delta t_b$ ,  $\Delta t_c$ , are measured by the methods disclosed in EP-A-0 880 712 and the values of  $a$ ,  $b$ ,  $c$ , and  $v$  are known. Hence the equations (1) can be solved to find the position of the handset,  $r$ , together with the value of  $\varepsilon$ .

In WO-A-99/21028, the contents of which are hereby incorporated by reference, it is described how these same time offsets can be measured using locally-created *templates* in a GSM telephone system as follows. Suppose that the handset  $R$  has recorded a short burst of the GSM signals from BTS  $A$ . Contained within that recording is the framing structure, synchronisation bursts and other 'given' data (or

predetermined values) which are a constant feature of those transmissions. The processor within the handset can create a matching template, based on the known structure of the network signals. Received signals can then be matched by the locally-generated template. When the template finds a match, the correlation peak at the position of best match corresponds to the time offset between the received signals and the local clock inside the handset. For the signals radiated by BTS A this measured time offset,  $\Delta t_{a1}$ , is given by

$$\Delta t_{a1} = (|r - a|)/v + \alpha_a + \epsilon_1 ,$$

where  $\alpha_a$  is the time offset of the BTS transmissions and  $\epsilon_1$  is the time offset of the handset's internal clock, both relative to an imaginary universal 'absolute' clock. The signals from BTSs B and C may also be measured in the same way, giving

$$\Delta t_{b1} = (|r - b|)/v + \alpha_b + \epsilon_1 ,$$

and

$$\Delta t_{c1} = (|r - c|)/v + \alpha_c + \epsilon_1 . \tag{2}$$

The same measurements can also be made by the LMU, giving

$$\Delta t_{a2} = (|a|)/v + \alpha_a + \epsilon_2 ,$$

$$\Delta t_{b2} = (|b|)/v + \alpha_b + \epsilon_2 ,$$

and

$$\Delta t_{c2} = (|c|)/v + \alpha_c + \epsilon_2 , \tag{3}$$

where  $\epsilon_2$  is the time offset of the LMU's internal clock relative to the same imaginary universal absolute clock. Subtracting equations 3 from equations 2 gives

$$\Delta t_a = \Delta t_{a1} - \Delta t_{a2} = (|r - a| - |a|)/v + \varepsilon,$$

$$\Delta t_b = \Delta t_{b1} - \Delta t_{b2} = (|r - b| - |b|)/v + \varepsilon,$$

5 and

$$\Delta t_c = \Delta t_{c1} - \Delta t_{c2} = (|r - c| - |c|)/v + \varepsilon, \quad (4)$$

10 where  $\varepsilon = \varepsilon_1 - \varepsilon_2$ . It will be noted that equations 4 are just like equations 1, and can be solved in the same way to find the position of the handset,  $r$ , and the value of  $\varepsilon$ .

It will be apparent that the CURSOR method as described above, in common with all other methods which use the signals from non-synchronised transmitters, requires a network of LMUs to be set up within the coverage area of the telephone system.

15 These units act as reference points at which the unsynchronised signals radiated by the BTSs are measured for comparison with the same signals received by a handset. Each position measurement requires a match to be made between the signals received by the handset from a number of nearby BTSs, and signals received by an LMU from the same set of BTSs. In practice, it is often difficult to find a match using just one LMU,

20 especially if the LMU network is sparse, since the handset may receive signals from BTSs not received by the LMU, and *vice-versa*. It is therefore necessary to combine the measurements from two or more LMUs. However, each new LMU brought into the calculation adds a further unknown clock time offset ( $\varepsilon_2$ ,  $\varepsilon_3$  etc.), each of which therefore requires an additional BTS measurement to provide the extra equation

25 needed to solve for all the unknown quantities.

One solution to this problem is presented in WO-A-99/21028 where it is shown how the LMU network can be synchronised. Referring to Figure 2, suppose that an adjacent pair of LMUs,  $U_1$  and  $U_2$ , can see a common BTS. The positions of the

30 LMUs and the BTS are all known, so a single measurement of the BTS signals by each LMU is sufficient to determine the clock time offset between the LMUs. For example, suppose that the distance from  $U_1$  to the BTS is  $s_1$ , and the distance from  $U_2$  to the BTS is  $s_2$ .  $U_1$  measures time offset  $\Delta t_1$  and  $U_2$  measures  $\Delta t_2$ , given by

$$\Delta t_1 = s_1/v + \alpha + \epsilon_{21} ,$$

$$\Delta t_2 = s_2/v + \alpha + \epsilon_{22} , \quad (5)$$

5

where  $\alpha$  is the time offset of the BTS transmissions, and  $\epsilon_{21}$  and  $\epsilon_{22}$  are the time offsets of the LMU internal clocks in  $U_1$  and  $U_2$  respectively. Subtracting the second equation from the first yields

$$\epsilon_{21} - \epsilon_{22} = \Delta t_1 - \Delta t_2 + s_1/v - s_2/v , \quad (6)$$

which is the relative time offset of the clock in  $U_1$  with respect to that in  $U_2$ . This process may be repeated for a second pair of LMUs, say  $U_2$  and  $U_3$ , and another BTS whose signals can be received by both members of this second pair of LMUs. In this way a synchronisation map may be calculated, which provides the clock offsets of all the LMU internal clocks relative to one of them adopted as a master 'LMU network clock time'. Having established the LMU synchronisation map in this fashion, a CURSOR position measurement can then include any number of LMUs without the penalty of adding an extra unknown time offset for every LMU, since the relative LMU time offsets are known.

The receivers discussed in the preceding paragraphs make measurements of time offsets. More generally, receivers can measure time offsets, phase offsets (which can be converted into time offsets with a modulo  $360^\circ$  ambiguity), frequency offsets or rates of change of frequency offsets. Though these measurements are of different quantities, the present invention is applied usefully to each of them as, when combined with similar measurements made by a second receiver, they can independently provide positional information. Positioning systems making use of these measurements are discussed in a related patent application (our reference MJB06427WO) filed simultaneously herewith.



The present invention teaches how the same advantages of an (effectively) synchronised LMU network may be obtained by setting up one or more 'virtual LMUs' in the network which act as interface nodes for the real LMUs.

- 5 According to a first aspect of the invention, there is provided a method of generating a list of offsets in time, phase, frequency, or derivatives thereof, or their equivalents expressed as offsets in distance or derivatives thereof, of a plurality of transmission source signals, received at a given location, relative to a common reference, the method comprising
- 10 (a) acquiring data from one or more receivers, the positions of which may be known or determined, the data from a receiver comprising offsets in time, phase, frequency, or derivatives thereof respectively of signals received from the transmission sources relative to a reference source in each receiver or to each other; and
- 15 (b) combining the acquired data and calculating the list of offsets relative to the common reference.

In practice the offsets from the list can be used in place of offsets obtained directly from the receiver or receivers.

- 20 The relative offsets in time, phase, frequency, or derivatives thereof, with respect to each other or with respect to a reference source, of the signals received by a first receiver from a plurality of the transmission sources may be represented by corresponding offsets or differences in the distances between the transmission sources
- 25 and the first or second receivers.

The invention also includes apparatus using the method above, the apparatus comprising

- 30 (a) means for acquiring data from one or more receivers, the positions of which may be known or determined, the data from a receiver comprising offsets in time, phase, frequency, or derivatives thereof respectively of signals received from the transmission sources relative to a reference source in each receiver or to each other; and

- (b) means for combining the acquired data and calculating the list of offsets relative to the common reference.

In a method using techniques similar to or as described in EP-A-0 880 712, in place of  
5 offsets in time, phase, frequency, or derivatives thereof, or their equivalents expressed  
as offsets in distance or derivatives thereof, data representative of the received signals  
may be used, from which the offsets of signals received from the transmission sources  
relative to the reference source may be determined.

10 Therefore, the invention also includes a method of generating a list of offsets in time,  
phase, frequency, or derivatives thereof, or their equivalents expressed as offsets in  
distance or derivatives thereof, of a plurality of transmission source signals, received  
at a given location, relative to a common reference, the method comprising

- (a) acquiring data from one or more receivers, the positions of which may  
15 be known or determined, the data from a receiver being representative  
of the received signals;
- (b) determining from the acquired data the offsets in time, phase,  
frequency, or derivatives thereof respectively of signals received from  
the transmission sources relative to a reference source or to each other;  
20 and
- (c) combining the offsets so determined and calculating the list of offsets  
relative to the common reference.

The invention also includes apparatus for carrying out the method described  
25 immediately above, the apparatus comprising

- (a) means for acquiring data from one or more receivers, the positions of  
which may be known or determined, the data from a receiver being  
representative of the received signals;
- (b) means for determining from the acquired data the offsets in time, phase,  
30 frequency, or derivatives thereof respectively of signals received from  
the transmission sources relative to a reference source or to each other;  
and
- (c) means for combining the offsets so determined and calculating the list  
of offsets relative to the common reference.

A radio positioning method and system including either of the methods and apparatus defined above also form part of the present invention.

- 5 The invention also includes apparatus (a 'virtual LMU') for carrying out either or both of these methods. The apparatus may include a computer (located anywhere convenient) and programmed to carry out the required process. Although the following description of a particular application of the invention concerns signals in a digital telephone network, it will be apparent that the invention is by no means  
10 restricted to this application but may be applied to any network of one or more transmitters, synchronised or unsynchronised, set up for any purpose.

A virtual LMU includes a computer process which may run on any computer platform able to obtain data from real LMUs. Accordingly, a further aspect of the invention  
15 includes a method of calculating and maintaining a list of offsets in time, phase, frequency, or derivatives thereof, or their equivalents expressed as offsets in distance or derivatives thereof, of a plurality of transmission source signals, received at a given location, relative to a common reference.

- 20 It is assumed that the network of BTSs is *unsynchronised* in that the transmission time offsets of the BTS signals bear no constant or known relationship to each other, but that nevertheless the BTS oscillators are quite *stable*, so that their instantaneous frequencies change only slowly with time. In these circumstances, it is possible to predict the currently received offset in time, phase, frequency, or derivatives thereof of  
25 the signals from a given BTS by a given real LMU from sufficiently-recent historical data. The real LMUs in the network make measurements of all the BTSs they can detect in a cyclic fashion, repeating the cycle every few seconds. They maintain these measurements in a stack, replacing the oldest measurements with the most recent. A linear or low-order polynomial fit to the measurements therefore provides a predictor  
30 for extrapolation into the near future, or for interpolation in the recent past. Assume that the BTS oscillators are sufficiently stable that reliable predictions can be made over a period of, say, ten minutes. Then, every few minutes, the virtual LMU (VLMU) contacts each real LMU and receives its predictors for the received offsets of the signals from all the BTSs in its measurement set. It is likely that many of the

BTSs will have been measured by more than one LMU, so the VLMU analyses the complete data set from all the real LMUs using well-known methods to determine both (a) the best values of the real LMU internal clock offsets in time, phase, frequency, or derivatives thereof, and hence (b) the received offsets in time, phase, frequency, or derivatives thereof of the signals from all the BTSs which would have been measured by a real LMU located at the assumed position of the VLMU and capable of receiving signals from every BTS.

In the above description of the function of the VLMU, it should be understood that any or all of the LMUs could be replaced by other receivers, not necessarily fixed or at known positions, which have not been set up specifically as LMUs. For example, the data from a number of handsets could be used to determine frequency offsets if the handsets were stationary. Furthermore, it is shown in a related patent application (our reference MJB06427WO) filed simultaneously herewith, how the positions and velocities of handsets can be determined without the need for any LMUs at all.

Particular advantages of using a VLMU in a network include the following:

- (a) a full match can be guaranteed between a handset's measurements and a single (virtual) LMU;
- (b) the VLMU process minimises the timing errors in individual LMU measurements;
- (c) the VLMU list is immediately available to the position calculation process, increasing the speed of computation;
- (d) when combined with the ideas described in a related patent application (our reference MJB06427WO) filed simultaneously herewith, a list of receive time offsets can be created in a network of BTSs where there are few if any real LMUs;
- (e) the VLMU provides, in effect, a synchronisation map of the real LMU network which network may then be used to monitor the BTS network and, in particular, to determine locations of newly-installed BTSs.

One example of a method and apparatus according to the present invention will now be described with reference to the accompanying drawings, in which:

Figure 1 shows the geometry of a CURSOR system as described in EP-A-0 880 712;

Figure 2 shows adjacent LMUs making measurements of a common BTS;

Figure 3 shows a network of real and virtual LMUs in a system of the invention;

5 Figure 4 illustrates a similar, simplified network;

Figure 5 shows the positions of LMU sites and BTS sites in a real network;

Figure 6 shows the same network with the addition of a Virtual LMU;

10

Figure 7 shows the same network with the real LMUs replaced by the Virtual LMU;

Figure 8 illustrates, by way of a flow chart, the processing which takes place inside an LMU;

15

Figure 9 illustrates, by way of a flow chart, the processing which takes place inside the VLMU;

20 Figure 10 shows a list of timing offsets generated in a real system such as that shown in the example of Figures 5 to 9; and

Figure 11 shows a table of timing errors associated with LMUs and a virtual LMU in this example.

25 By way of example, and with reference to Figure 3, the function of a virtual LMU is now described which determines timing offsets.

Consider a network of  $N$  real LMUs and  $M$  BTSs which includes a virtual LMU (VLMU). The position of the  $n^{\text{th}}$  LMU,  $U_n$ , is represented by the vector  $\mathbf{u}_n$  and the  
30 position of the  $m^{\text{th}}$  BTS,  $B_m$ , is represented by the vector  $\mathbf{b}_m$ , both vectors being with respect to the same origin. Signals radiated by BTS  $m$  will be received by LMU  $n$  after a time lag, and the measurement of this time lag,  $\Delta t_{nm}$ , is given by

$$\Delta t_{nm} = |u_n - b_m|/v + \varepsilon_n + \alpha_m \pm \sigma_{nm}, \quad (7)$$

where  $\varepsilon_n$  is the clock time offset of LMU  $n$ ,  $\alpha_m$  is the transmission time offset of BTS  $m$ , both with respect to an imaginary universal 'absolute' clock, and  $\sigma_{nm}$  is an estimate  
 5 of the error in the measurement of  $\Delta t_{nm}$ . The assumed position of the virtual LMU,  $V$ , is represented by the vector  $v$ . If the VLMU were able to receive the signals directly from BTS  $m$  without error then it would measure a receive time offset,  $\beta_m$ , relative to the imaginary universal absolute clock, given by

$$\beta_m = |v - b_m|/v + \alpha_m. \quad (8)$$

Substituting for  $\alpha_m$  in equation (7) using the value deduced from equation (8) gives

$$\Delta t_{nm} = |u_n - b_m|/v + \varepsilon_n + \beta_m - |v - b_m|/v \pm \sigma_{nm}. \quad (9)$$

15 Over the entire network of  $N$  LMUs, all of the  $M$  BTSs are visible. Each individual LMU, however, will only see a few of them, but as long as there is significant overlap of visibility, it is possible to take the set of all  $\Delta t$  values and solve for values of  $\varepsilon_n$  and  $\beta_m$ . Hence the VLMU can calculate timings for any BTS as if the network of LMUs were synchronised, or as if just one LMU (the VLMU,  $V$ ) was all that was needed to  
 20 cover the entire BTS network.

To illustrate this further, a simplified problem is shown and solved below using  $N = 2$  and  $M = 4$ , i.e. a network consisting of just 2 LMUs monitoring 4 BTSs (see Figure 4). For simplicity it is chosen that  $\varepsilon_1 = 0$ . This is allowed as the 'absolute' clock time  
 25 is completely arbitrary and may, for example, be measured by the internal clock of LMU number one. (Note, however, that this choice does introduce an asymmetry into the solution in that the error associated with BTSs three and four are not the same.) The first LMU ( $U_1$ ) can receive signals from BTS numbers one, two and three, but cannot receive the signals from BTS number four. The second LMU ( $U_2$ ) can receive  
 30 the signals from BTSs one, two and four, but cannot see BTS number three. The equations can be written in matrix form as

$$\begin{pmatrix} 1 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 & 1 \\ 0 & 1 & 0 & 0 & 1 \\ 0 & 0 & 0 & 1 & 1 \end{pmatrix} \begin{pmatrix} \beta_1 \\ \beta_2 \\ \beta_3 \\ \beta_4 \\ \varepsilon_2 \end{pmatrix} = \begin{pmatrix} \Delta_{11} - \frac{|u_1 - b_1| - |v - b_1|}{v} \\ \Delta_{12} - \frac{|u_1 - b_2| - |v - b_2|}{v} \\ \Delta_{13} - \frac{|u_1 - b_3| - |v - b_3|}{v} \\ \Delta_{21} - \frac{|u_2 - b_1| - |v - b_1|}{v} \\ \Delta_{22} - \frac{|u_2 - b_2| - |v - b_2|}{v} \\ \Delta_{24} - \frac{|u_2 - b_4| - |v - b_4|}{v} \end{pmatrix} + \mathbf{Z} \quad (10)$$

or equivalently as  $\mathbf{A} \cdot \mathbf{x} = \mathbf{b} + \mathbf{Z}$ , where  $\mathbf{Z}$  is an unknown vector of the actual errors on each measurement.

5

The standard technique known as 'least squares' postulates that the estimate for  $\mathbf{x}$  which minimises  $\mathbf{Z}$  is given by

$$\mathbf{x} = (\mathbf{A}^T \mathbf{W} \mathbf{A})^{-1} \mathbf{A}^T \mathbf{W} \mathbf{b}, \quad (11)$$

10

where the symbol  $\mathbf{A}^T$  indicates the transpose of the matrix  $\mathbf{A}$ , and the matrix  $\mathbf{W}$  is defined by

$$\mathbf{W} = \begin{pmatrix} \frac{1}{\sigma_{11}^2} & 0 & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{\sigma_{12}^2} & 0 & 0 & 0 & 0 \\ 0 & 0 & \frac{1}{\sigma_{13}^2} & 0 & 0 & 0 \\ 0 & 0 & 0 & \frac{1}{\sigma_{21}^2} & 0 & 0 \\ 0 & 0 & 0 & 0 & \frac{1}{\sigma_{22}^2} & 0 \\ 0 & 0 & 0 & 0 & 0 & \frac{1}{\sigma_{24}^2} \end{pmatrix} \quad (12)$$

15 This particular example can be solved explicitly. For simplicity, it is assumed that all the values of  $\sigma_{nm}$  are the same, and equal to  $\sigma$ . This gives the result

$$\begin{aligned} \beta_1 &= (3D_{11} + D_{12} + D_{21} - D_{22})/4 & \pm 0.87\sigma, \\ \beta_2 &= (3D_{12} + D_{11} + D_{22} - D_{21})/4 & \pm 0.87\sigma, \end{aligned}$$

$$\begin{aligned}
\beta_3 &= D_{13} & \pm 1.00\sigma, \\
\beta_4 &= (2D_{24} + D_{11} + D_{12} - D_{21} - D_{22})/2 & \pm 1.41\sigma, \\
\varepsilon_2 &= (D_{21} + D_{22} - D_{11} - D_{12})/2 & \pm 1.00\sigma,
\end{aligned} \tag{13}$$

5 where

$$D_{nm} = \Delta t_{nm} - \frac{|u_n - b_m| - |v - b_m|}{v}. \tag{14}$$

Note that even in this simple case, when a BTS is seen by both LMUs, the errors in the calculated offsets are less than those in each of the measurements themselves. This is an important advantage of the virtual LMU method.

The LMUs may also contain other means of synchronisation. For example, each real LMU could be connected to a GPS or other timing reference receiver, G, which serves to provide the common timing reference. In this case, the LMU network may be considered as synchronised already to this common timing reference (say GPS standard time), and then the VLMU need not solve for the individual values of  $\varepsilon$  as these are already known. One advantage of using other means of synchronisation is that there is no longer a requirement for overlap of visibility of BTSs between adjacent LMUs. If each BTS site also carried an LMU, then that LMU would need only to be able to receive the (very strong) signals from its co-sited BTS transmitter(s), thereby simplifying the installation of the LMU antenna.

The VLMU mode of operation described above may be called the 'pull mode' as it requires the VLMU to instigate data transfer to itself from every real LMU. It is also possible to have each real LMU continuously check the difference between its own prediction of the receive time offset from every BTS using the values calculated from the set of predictors last sent to the VLMU and the actual measured values. When any one of these differences exceeds a given value, the LMU can send its new predictor set to the VLMU. This mode of operation may be called the 'push mode'. The particular mode appropriate for a real system depends, amongst other things, on the stability of the BTS network.



An example of a prototype system constructed in accordance with the invention will now be described, in which timing measurements made by a number of LMUs are combined to create a list of receive time offsets for all the GSM BTSs in and around Cambridge, UK, as if they were observed by a single "Virtual" LMU.

5

The positions of nine LMUs,  $U_1 - U_9$  (shown as filled circles) and twenty three Cambridge area BTSs,  $B_1 - B_{23}$  (shown by unfilled squares) are plotted in Figure 5 on an Ordinance Survey (OS) grid. Each LMU comprises (a) hardware including an internal clock, a GSM radio, a computer, and a telephone connection, and (b) software including a program to compile a list of receive time offsets.

10

Figure 8 illustrates, by way of a flow chart, the main elements of the LMU software residing in each LMU,  $U_1 - U_9$ . Every few seconds the "scan cycle" program is entered at step A1. The program proceeds, in steps A2, A3, A6 and A7, to tune the GSM radio to each GSM transmission channel in turn and scan for BCCH signals. In the event that a BCCH signal is detected in step A3, the program calculates the receive time offset of the signal relative to its internal clock (in step A4) and updates its list of time offsets accordingly in step A5. The BCCH is also decoded to produce the ID of the BTS  $B_n$  from which the signal is received. Figure 5 also shows lines between LMUs and the BTSs detected by them as a result of the scan cycle routine.

15

20

Figure 6 shows the positions of the nine LMUs, the twenty three BTSs monitored by those LMUs and a Virtual LMU V (plotted as an unfilled circle). The Virtual LMU V comprises (a) hardware including a telephone connection to each real LMU and a computer, and (b) software including a program to compile a list of "virtual" receive time offsets.

25

Figure 9 illustrates, by way of a flow chart, the main elements of the VLMU software. Every 4 minutes the "VLMU update" program is entered at step V1. The program proceeds, in steps V2, V3, V5 and V6, to connect to each of the real LMUs via the telephone connections. If the connection to a given LMU  $U_1 - U_9$  succeeds, the program, in step V4, extracts that LMU's list of receive time offsets. On completion of the connection cycle, the program (in step V7) combines the data to produce a list of receive time offsets for all the BTSs monitored by the LMU network. An example

30

of this list is shown in Figure 10 where part of a table of receive time offsets generated by the VLMU is reproduced. The first column shows the BTS identifier and the figures in the table are in units of 1.85 microseconds. Figure 6 also shows lines between the VLMU V and each real LMU  $U_1 - U_9$  from which the VLMU software is  
5 able to extract a list of time offsets.

Once the "VLMU update" has been completed, the combined list of timings generated is equivalent to that which would have been observed had there been a single (real) LMU at the VLMU's location making timing measurements of every BTS in the  
10 network. Figure 7 illustrates this equivalence by showing the virtual monitoring of each BTS's timing measurements by the Virtual LMU (shown as lines between the VLMU V and the BTSs  $B_1 - B_{23}$ ).

Each timing measurement has an associated error which, in most cases, is smaller than  
15 the errors in the timing measurements made by the individual real LMUs. This is illustrated in the table of Figure 11, which shows part of the list produced by the VLMU during operation. The first column shows the identifier of each BTS. The columns headed 1 to 9 each relate to a particular one of the nine real LMUs. The figures in the table are errors in the timing measurements made by the real LMUs of  
20 the signals from the corresponding BTSs. An empty cell indicates that the LMU is unable to receive a BTS's signal. The column headed VLMU shows the result of combining the measurements using the method outlined above.

The timings in the table of Figure 11 are in units of 1.85 microseconds. Note that the  
25 VLMU timing errors are generally smaller than those estimated for real LMU timings, confirming an advantage of the VLMU method in reducing errors.

## CLAIMS

1. A method of generating a list of offsets in time, phase, frequency, or  
5 derivatives thereof, or their equivalents expressed as offsets in distance or derivatives  
thereof, of a plurality of transmission source signals, received at a given location,  
relative to a common reference, the method comprising
- (a) acquiring data from one or more receivers, the positions of which may  
be known or determined, the data from a receiver comprising offsets in time,  
10 phase, frequency, or derivatives thereof, respectively of signals received from  
the transmission sources relative to a reference source in each receiver or to  
each other; and
- (b) combining the acquired data and calculating the list of offsets relative  
to the common reference.
- 15
2. A method of generating a list of offsets in time, phase, frequency, or  
derivatives thereof, or their equivalents expressed as offsets in distance or derivatives  
thereof, of a plurality of transmission source signals, received at a given location,  
relative to a common reference, the method comprising
- 20 (a) acquiring data from one or more receivers, the positions of which may  
be known or determined, the data from a receiver being representative of the  
received signals;
- (b) determining from the acquired data the offsets in time, phase,  
frequency, or derivatives thereof, respectively of signals received from the  
25 transmission sources relative to a reference source or to each other; and
- (c) combining the offsets so determined and calculating the list of offsets  
relative to the common reference.
3. A radio positioning method for determining the position of one or more  
30 receivers the positions of which are unknown, which method includes the method of  
claim 1 or claim 2.
4. A radio positioning method according to claim 3, wherein the common  
reference comprises an external reference.

5. A radio positioning method according to claim 4, wherein the common reference comprises a GPS signal.
- 5 6. A radio positioning method according to any of claims 3 to 5, wherein the step of acquiring data from said one or more receivers includes instigating acquisition of said data from a common location.
7. A radio positioning method according to any of claims 3 to 5, wherein the step  
10 of acquiring data from said one or more receivers includes instigating acquisition of said data from each said receiver at times determined by each said receiver.
8. Apparatus for generating a list of offsets in time, phase, frequency, or derivatives thereof, or their equivalents expressed as offsets in distance or derivatives  
15 thereof, of a plurality of transmission source signals, received at a given location, relative to a common reference, the apparatus comprising
- (a) means for acquiring data from one or more receivers, the positions of which may be known or determined, the data from a receiver comprising offsets in time, phase, frequency, or derivatives thereof, respectively of signals  
20 received from the transmission sources relative to a reference source in each receiver or to each other; and
- (b) means for combining the acquired data and calculating the list of offsets relative to the common reference.
- 25 9. Apparatus for generating a list of offsets in time, phase, frequency, or derivatives thereof, or their equivalents expressed as offsets in distance or derivatives thereof, of a plurality of transmission source signals, received at a given location, relative to a common reference, the apparatus comprising
- (a) means for acquiring data from one or more receivers, the positions of  
30 which may be known or determined, the data from a receiver being representative of the received signals;
- (b) means for determining from the acquired data the offsets in time, phase, frequency, or derivatives thereof, respectively of signals received from the transmission sources relative to a reference source or to each other; and

(c) means for combining the offsets so determined and calculating the list of offsets relative to the common reference.

10. A radio positioning system including apparatus according to claim 8 or to  
5 claim 9.

11. A radio positioning system according to claim 10, wherein the common reference comprises a reference external to said receivers.

10 12. A radio positioning system according to claim 11, wherein the common reference comprises a GPS signal.

13. A radio positioning system according to any of claims 10 to 12, wherein the means for acquiring data from said one or more receivers includes a computer system  
15 arranged to instigate the transfer of said data from said one or more receivers to said computer system at times determined by said computer system.

14. A radio positioning system according to any of claims 10 to 13, wherein the means for acquiring data from said one or more receivers includes a computer system,  
20 and including means for instigating said acquisition of data from each said receiver at times determined by each said receiver.

15. A digital telephone network, including a radio positioning system according to any of claims 10 to 14.

1/9

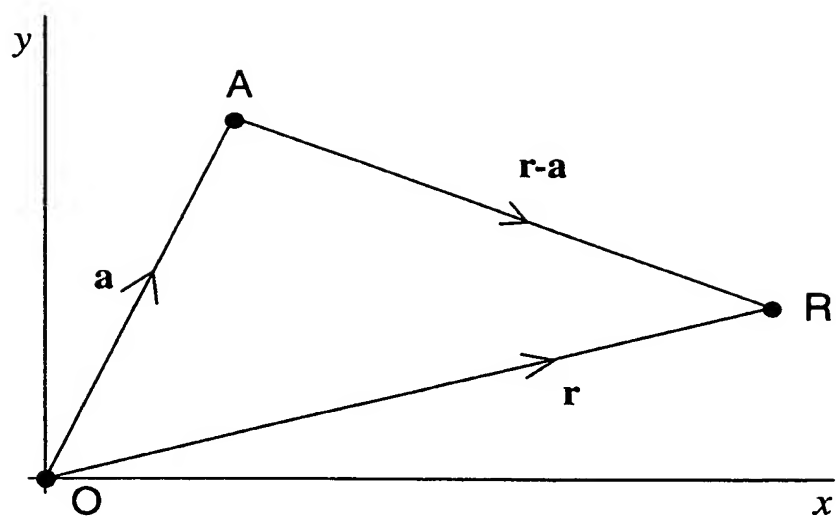


Figure 1

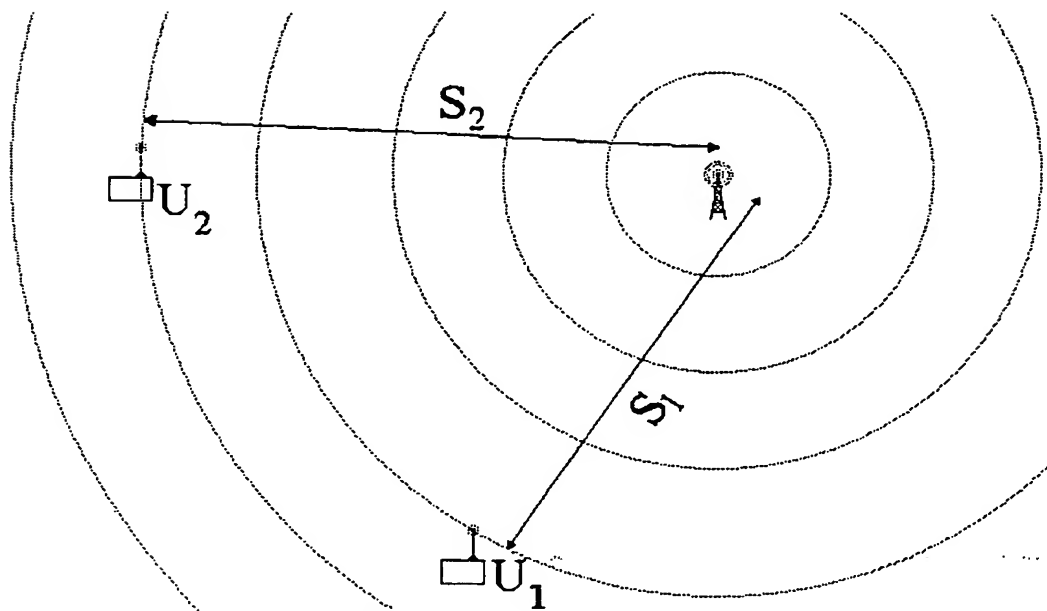


Figure 2

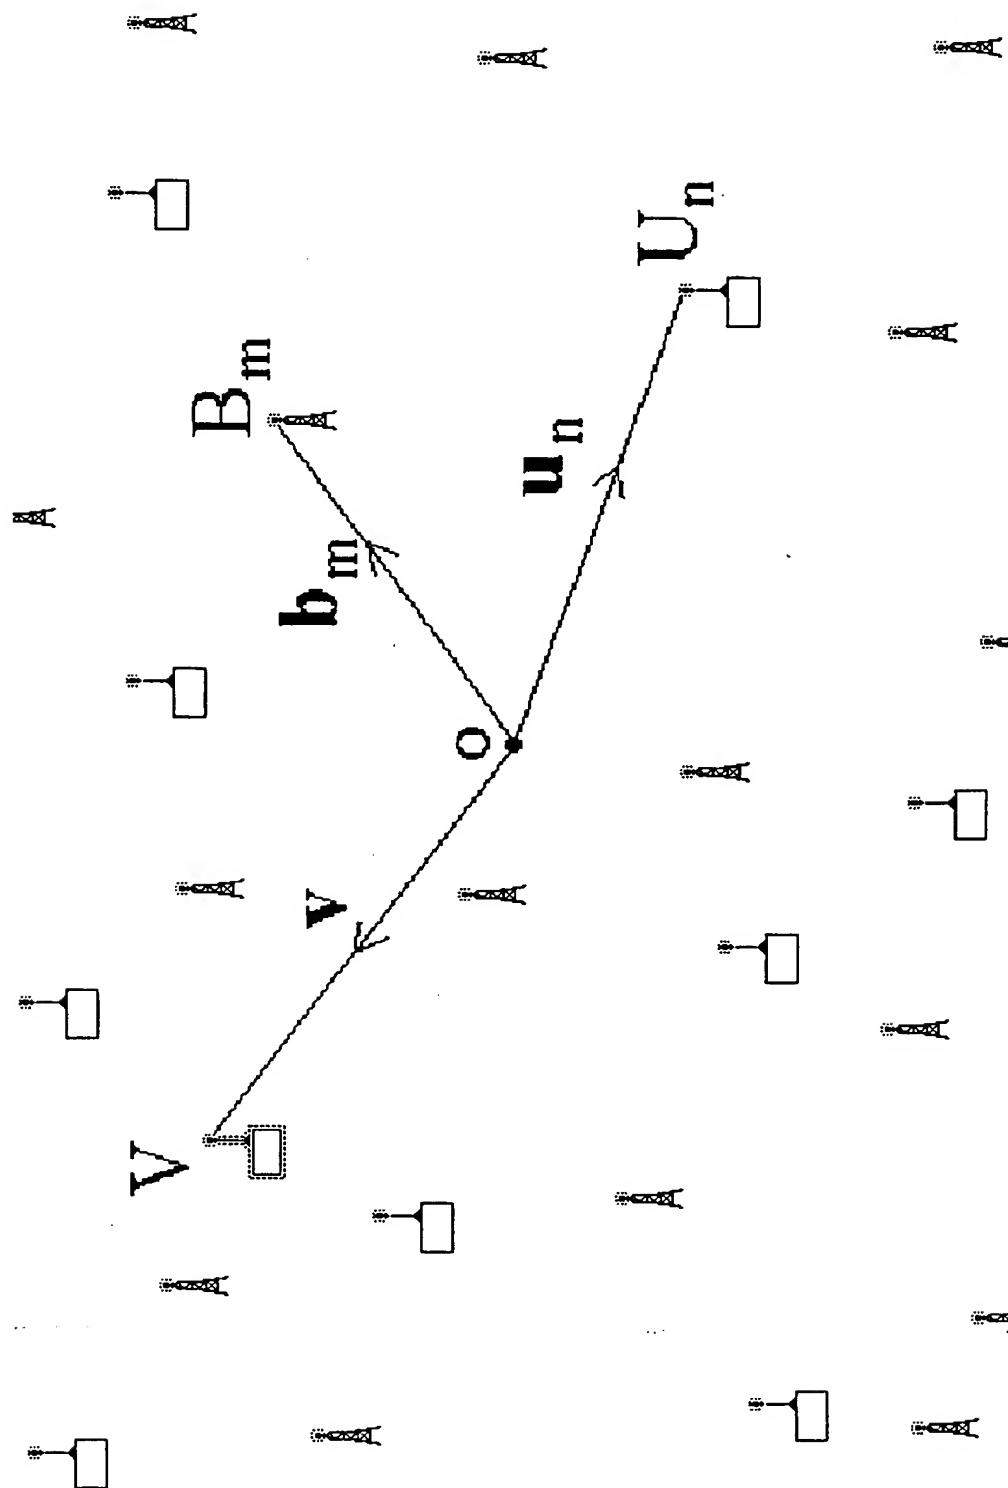


Figure 3

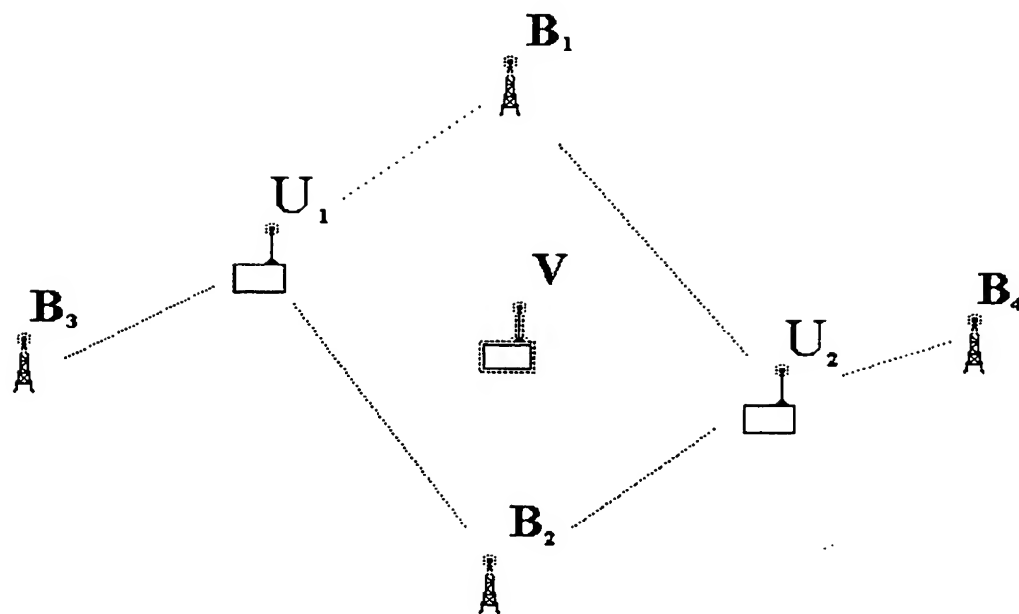


Figure 4



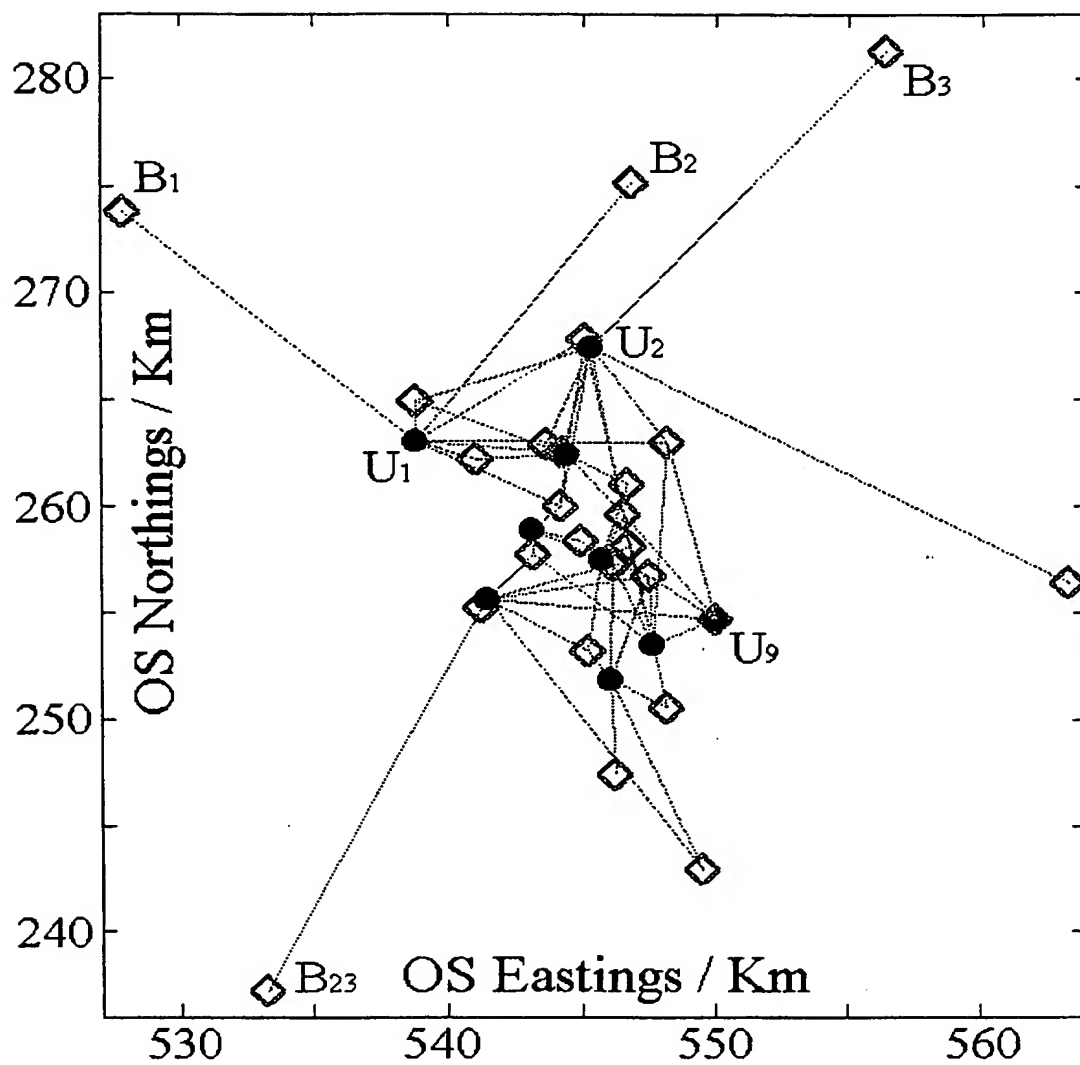


Figure 5

5/9

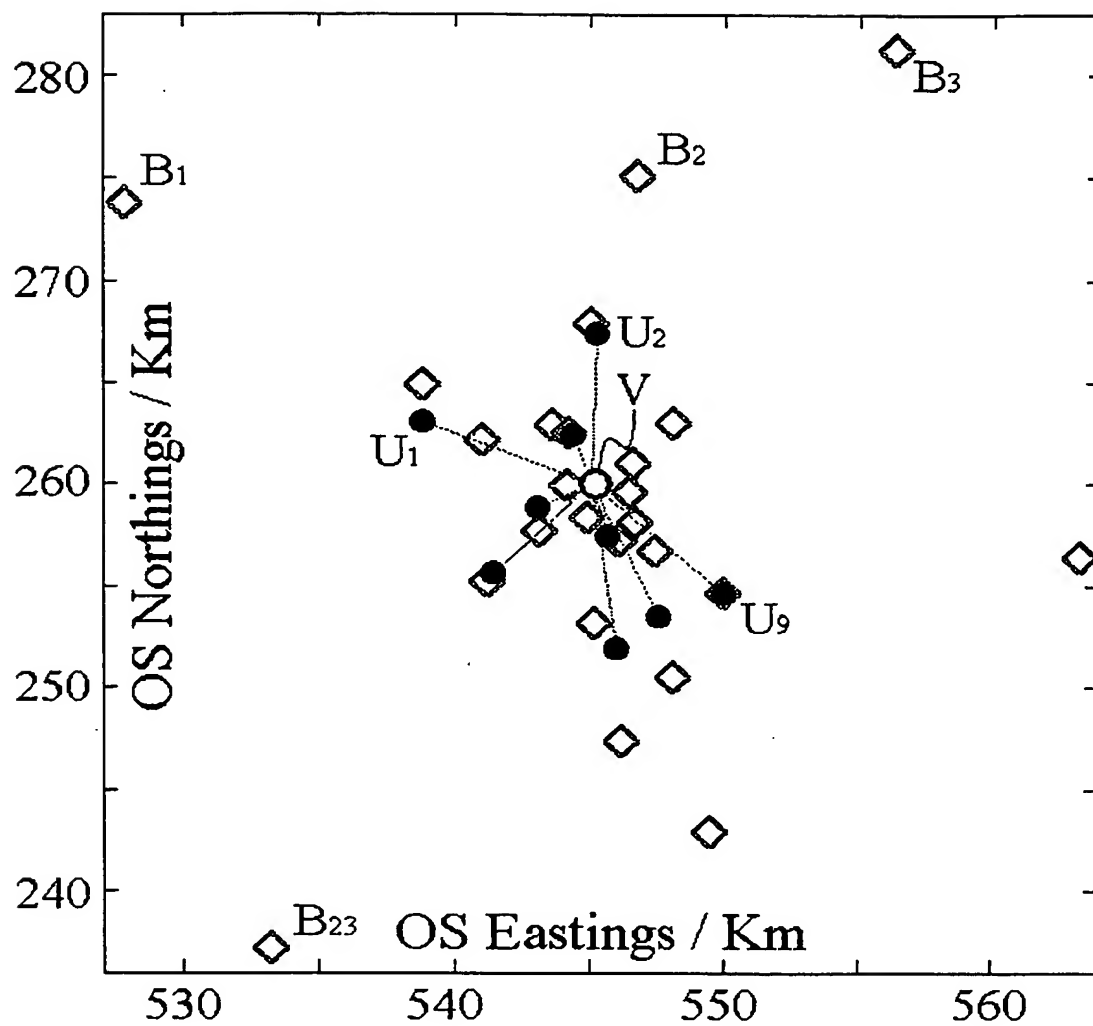


Figure 6

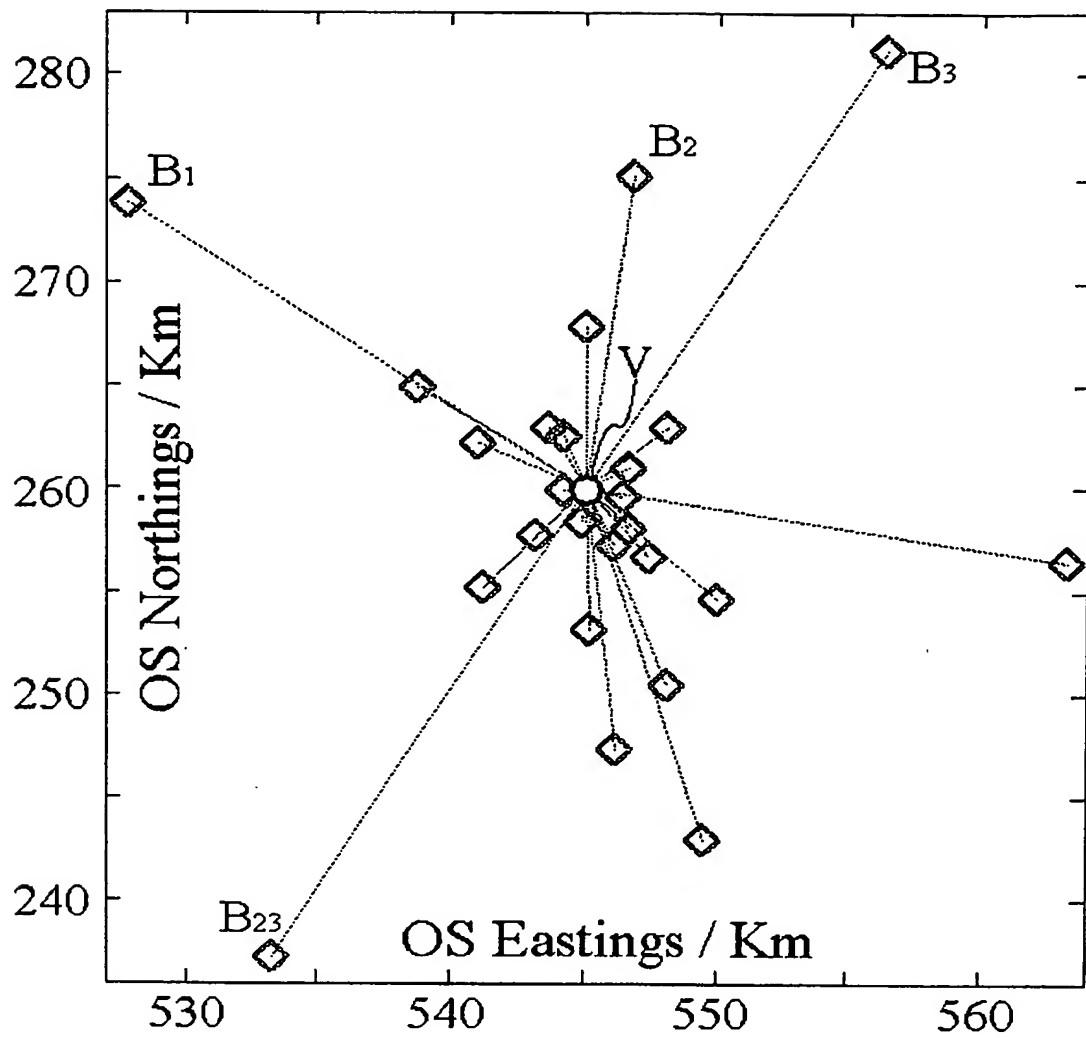


Figure 7

7/9

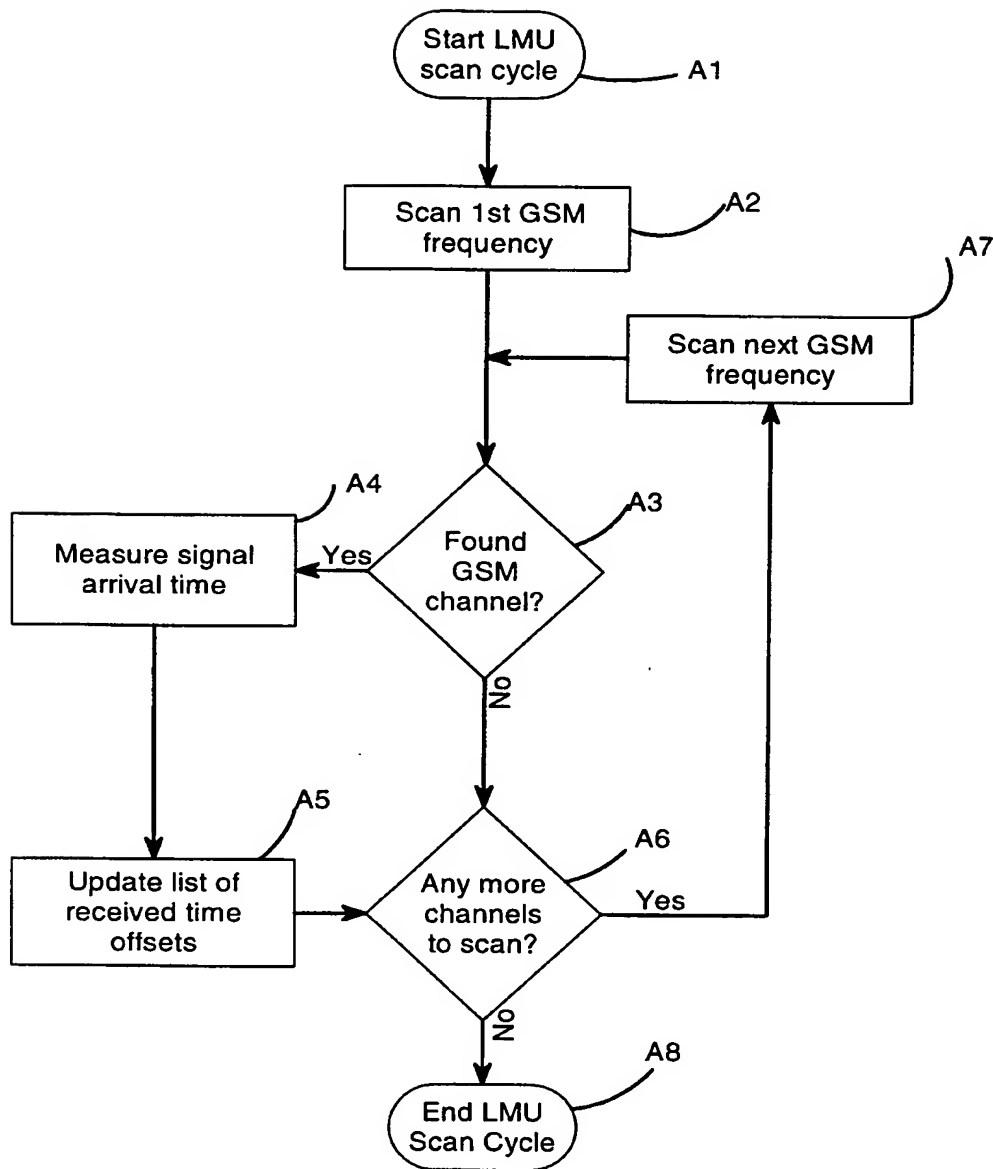


Figure 8

8/9

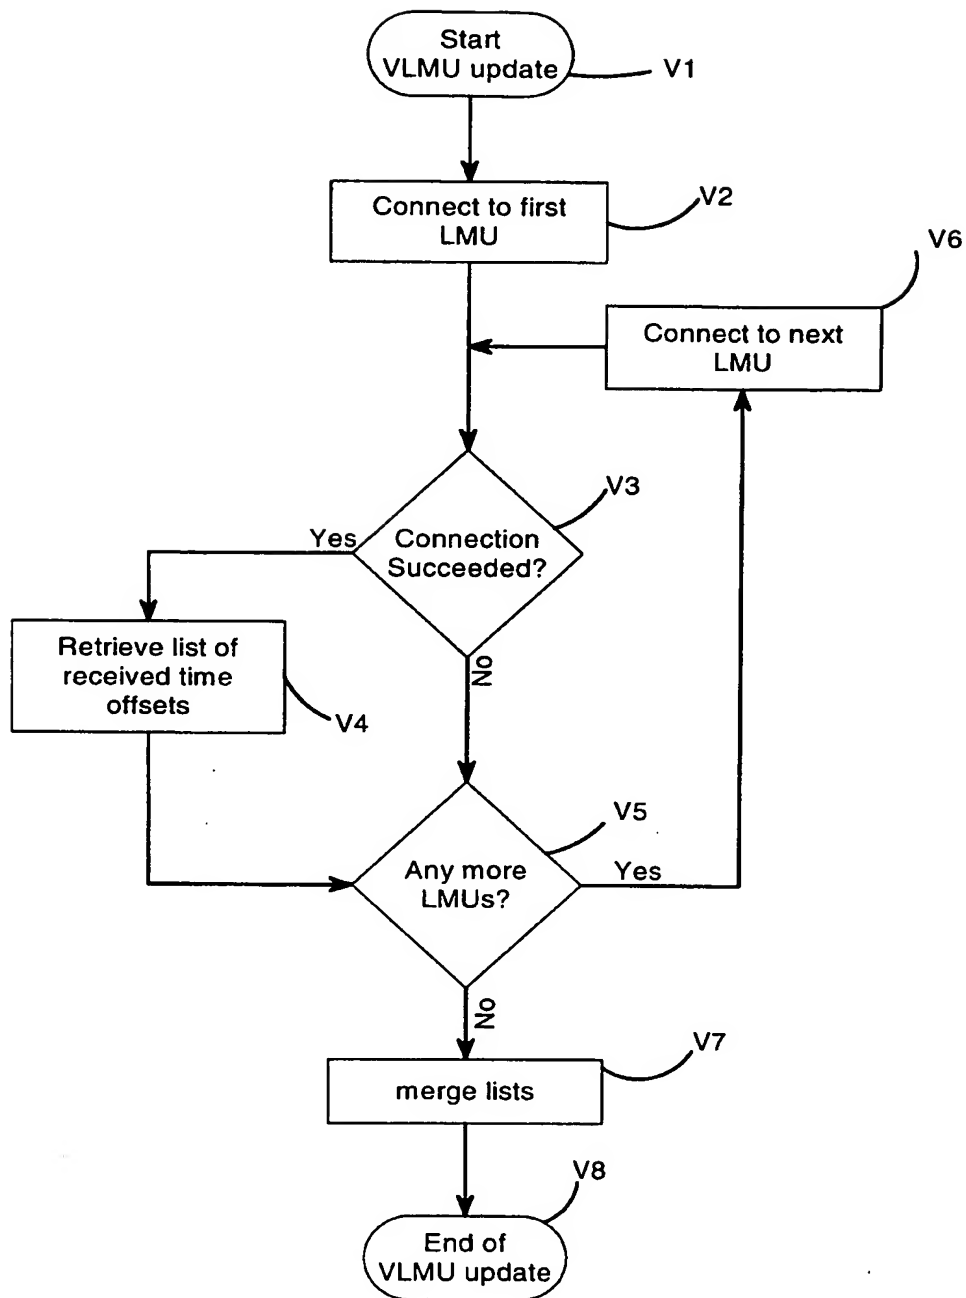


Figure 9

9/9

BTS identifier	VLMU receive time offsets
1727	1959.950
1728	75.364
1729	604.57
1730	15
1731	479
17332	97.851
17333	797.813
17342	2072.920
17343	182.409
18072	1686.043
18073	1028.109
33060	1061.910
33070	1453.715
42140	1343.821
55440	60.012
55500	2026.607
55512	1690.698
55513	1772.834
55530	2221

Figure 10

LMU number	1	2	3	4	5	6	7	8	9	VLMU
BTS identifier										
1727					0.098	0.168				0.101
1728	0.091				0.136	0.076		0.071		0.048
1729				0.159						0.099
1730					0.092			0.087		0.091
17332										0.083
17333		0.163	0.061							0.055
17342	0.087			0.044		0.074	0.049	0.050		0.031
17343				0.044			0.047			0.041
18072		0.048	0.066							0.050
18073		0.125							0.089	0.129
33060			0.045	0.047			0.036			0.033
33070		0.050	0.033						0.138	0.040
42140		0.053	0.084			0.171			0.055	0.045
55440	0.056									0.069
55500			0.058	0.066	0.138	0.046	0.067			0.033
55512				0.048		0.038	0.039			0.032
55513				0.047			0.058		0.078	0.040
					0.146			0.096		0.15
								0.08		

Figure 11

# INTERNATIONAL SEARCH REPORT

Inter national Application No  
PCT/GB 00/02104

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01S5/10 G01S5/00 G01S1/02 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01S H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 689 270 A (GREENBAUM LOUIS A ET AL) 18 November 1997 (1997-11-18)	1,8
Y	abstract	2-6, 9-13,15
A	column 2, line 5 -column 3, line 32 column 5, line 60 -column 6, line 16 column 15, line 37 -column 16, line 57 column 17, line 9 -column 18, line 8 column 19, line 12 -column 20, line 17 figure 1  --- -/--	7,14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

5 September 2000

Date of mailing of the international search report

12/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Roost, J

# INTERNATIONAL SEARCH REPORT

Inter national Application No  
PCT/GB 00/02104

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 97 11384 A (CAMBRIDGE POSITIONING SYS LTD ;GRAINGE KEITH J B (GB); DUFFETT SM) 27 March 1997 (1997-03-27) cited in the application	2-6, 9-13,15
A	abstract page 2, line 28 -page 3, line 31 page 4, line 21 -page 5, line 14 page 17, line 20 -page 18, line 4 ---	1,8
X	WO 98 52376 A (NOKIA TELECOMMUNICATIONS OY ;RANTALAINEN TIMO (FI); SILVENTOINEN M) 19 November 1998 (1998-11-19)	1,8
A	abstract  page 1, line 23 - line 34 page 4, line 16 -page 6, line 11 page 7, line 24 -page 10, line 17 page 11, line 35 -page 12, line 13 page 13, line 1 - line 12 ---	2-4,6,7, 9-11, 13-15
A	WO 97 23785 A (DRANE CHRISTOPHER R ;MACNAUGHTAN MALCOLM D (AU); SCOTT CRAIG A (AU) 3 July 1997 (1997-07-03) abstract page 6, line 12 - line 15 page 10, line 4 -page 14, line 14 ---	1,2,8,9
A	WO 97 30360 A (ERICSSON TELEFON AB L M) 21 August 1997 (1997-08-21) abstract page 6, line 17 -page 7, line 5 page 11, line 23 -page 14, line 31 ---	1,2,8,9
A	WO 99 21028 A (CAMBRIDGE POSITIONING SYS LTD ;DUFFETT SMITH PETER (GB); HANSEN PA) 29 April 1999 (1999-04-29) cited in the application abstract page 1, line 18 -page 2, line 7 page 8, line 15 - line 28 page 10, line 12 -page 12, line 15 ---	1,2
A	EP 0 303 371 A (DUFFETT SMITH PETER JAMES) 15 February 1989 (1989-02-15) cited in the application abstract -----	2



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/02104

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5689270 A	18-11-1997	US 5499032 A US 5280295 A US 5173710 A CA 2179169 A AU 665571 B AU 2540292 A CA 2114648 A EP 0598844 A JP 6510120 T WO 9304378 A	12-03-1996 18-01-1994 22-12-1992 22-06-1995 11-01-1996 16-03-1993 04-03-1993 01-06-1994 10-11-1994 04-03-1993
WO 9711384 A	27-03-1997	AU 713289 B AU 6994296 A BR 9610493 A CA 2230982 A CN 1202968 A EP 0880712 A JP 11513482 T RU 2137150 C US 6094168 A	25-11-1999 09-04-1997 06-04-1999 27-03-1997 23-12-1998 02-12-1998 16-11-1999 10-09-1999 25-07-2000
WO 9852376 A	19-11-1998	AU 2895997 A EP 1008269 A NO 995452 A	08-12-1998 14-06-2000 08-11-1999
WO 9723785 A	03-07-1997	AU 708505 B AU 1133297 A	05-08-1999 17-07-1997
WO 9730360 A	21-08-1997	SE 513196 C AU 1817497 A CA 2245878 A CN 1211377 A EP 0883968 A JP 2000504838 T SE 9600577 A US 5960355 A	31-07-2000 02-09-1997 21-08-1997 17-03-1999 16-12-1998 18-04-2000 17-08-1997 28-09-1999
WO 9921028 A	29-04-1999	AU 9549898 A EP 1025453 A NO 20002068 A	10-05-1999 09-08-2000 19-04-2000
EP 0303371 A	15-02-1989	AT 86757 T AU 2120788 A BR 8807655 A CA 1314964 A DE 3879032 A DE 3879032 T DK 34690 A EP 0377592 A ES 2038758 T WO 8901637 A HK 38994 A JP 2504673 T NO 177944 B US 5045861 A	15-03-1993 09-03-1989 05-06-1990 23-03-1993 15-04-1993 24-06-1993 09-02-1990 18-07-1990 01-08-1993 23-02-1989 29-04-1994 27-12-1990 11-09-1995 03-09-1991